



US006652325B2

(12) **United States Patent**
Tharp et al.

(10) **Patent No.:** **US 6,652,325 B2**
(45) **Date of Patent:** **Nov. 25, 2003**

(54) **HIGH DATA RATE ELECTRICAL CONNECTOR**

(75) Inventors: **Keith F. Tharp**, San Jose, CA (US);
Theodore J. Colburn, Santa Cruz, CA (US)

(73) Assignee: **Enhance, Inc.**, San Jose, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 6 days.

(21) Appl. No.: **10/007,830**

(22) Filed: **Nov. 9, 2001**

(65) **Prior Publication Data**

US 2002/0132529 A1 Sep. 19, 2002

Related U.S. Application Data

(60) Provisional application No. 60/276,590, filed on Mar. 15, 2001, and provisional application No. 60/323,730, filed on Sep. 19, 2001.

(51) **Int. Cl.**⁷ **H01R 24/00**

(52) **U.S. Cl.** **439/660; 439/701; 439/942; 439/457**

(58) **Field of Search** **439/660, 637, 439/942, 457, 701**

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,457,640 A 7/1969 Rayburn
3,713,073 A 1/1973 Narozny

4,643,509 A 2/1987 Hollyday et al.
4,881,904 A 11/1989 Ammon et al.
4,902,242 A 2/1990 Davis et al.
5,009,614 A 4/1991 Fogg et al.
5,766,033 A 6/1998 Davis
6,039,611 A * 3/2000 Yang 439/701
6,139,363 A 10/2000 Ko et al.
6,139,372 A 10/2000 Yang
6,273,749 B1 8/2001 Yang
6,354,886 B1 3/2002 Yu

* cited by examiner


Primary Examiner—Tho D. Ta

(74) *Attorney, Agent, or Firm*—Beyer Weaver & Thomas, LLP

(57) **ABSTRACT**

A connector device that can reliably carry high data rates is described. The device disclosed offers multiple termination mediums and a variety of electrical packaging applications. The connector device ensures a high degree of wire position control through the use of wire retention combs and/or registration holes. The wire retention combs grip and secure portions of the discrete wires, and the registration block secures the ends of the exposed wires such that a stable connection between the wires and the electrical contact leads of the device can be maintained. In alternative embodiments, one surface of the contact leads are designed to connect with discrete wires and an opposite surface of the contact leads are designed to connect to an electronic device card. In some embodiments of the present invention, the connector device is formed of two substantially identical components that are attached to each other.

38 Claims, 8 Drawing Sheets

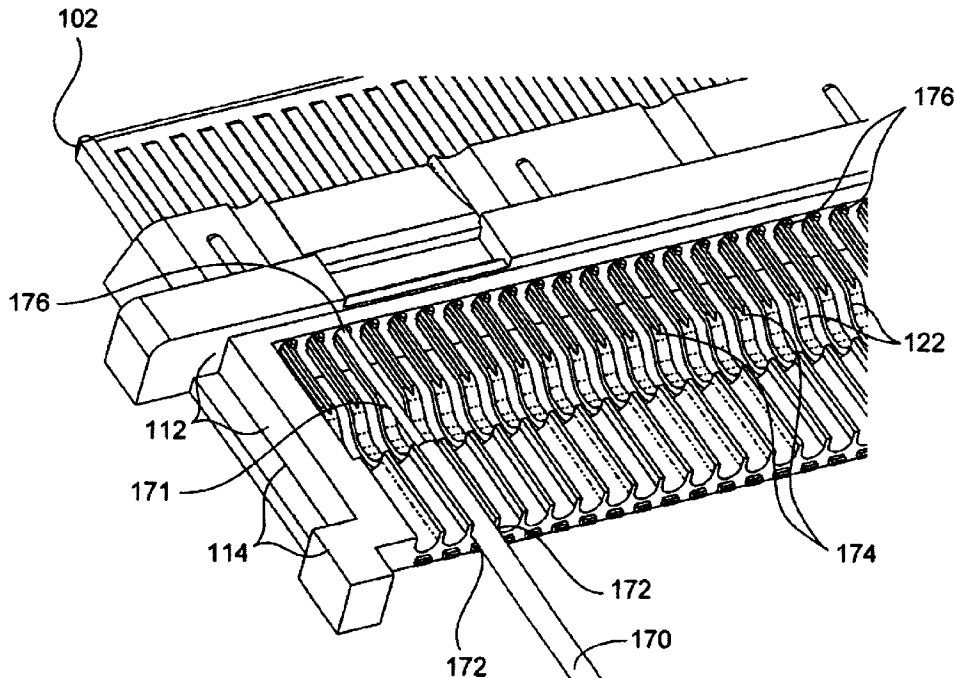

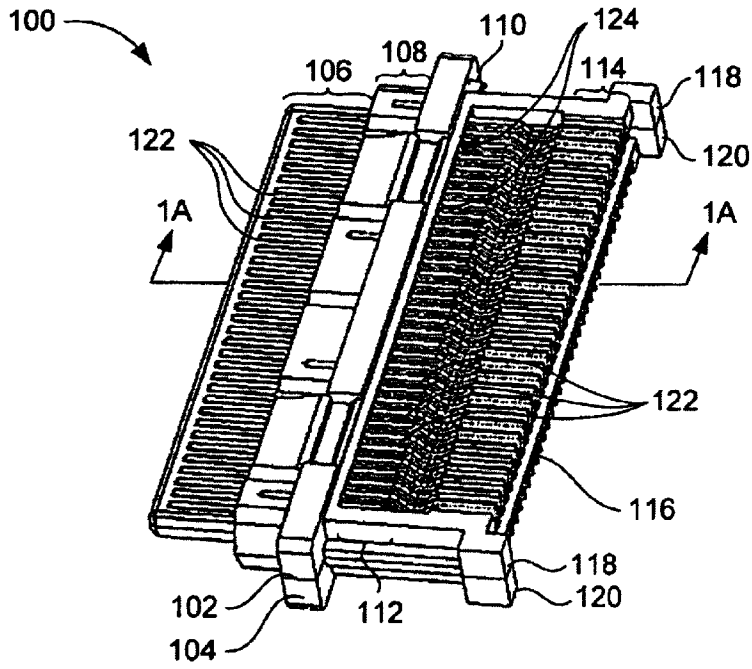


FIG. 1

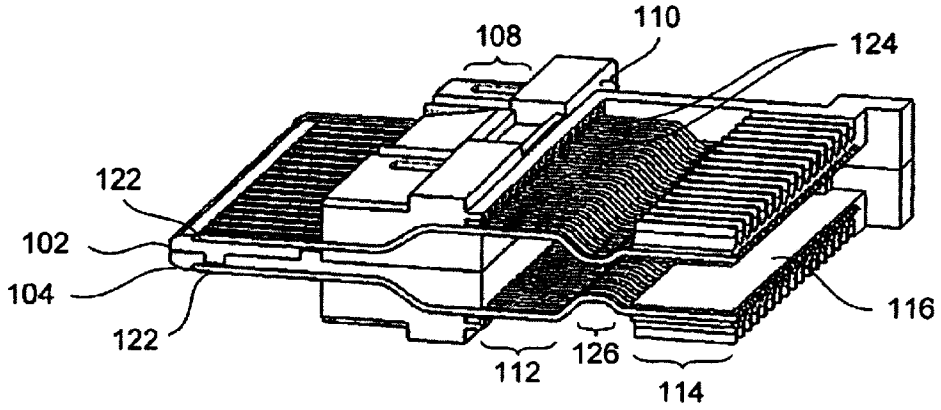


FIG. 1A

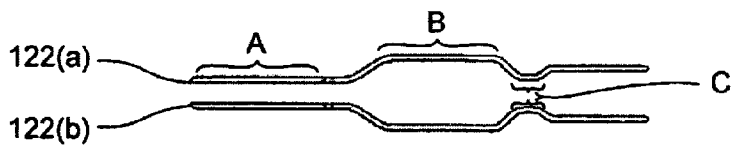


FIG. 2

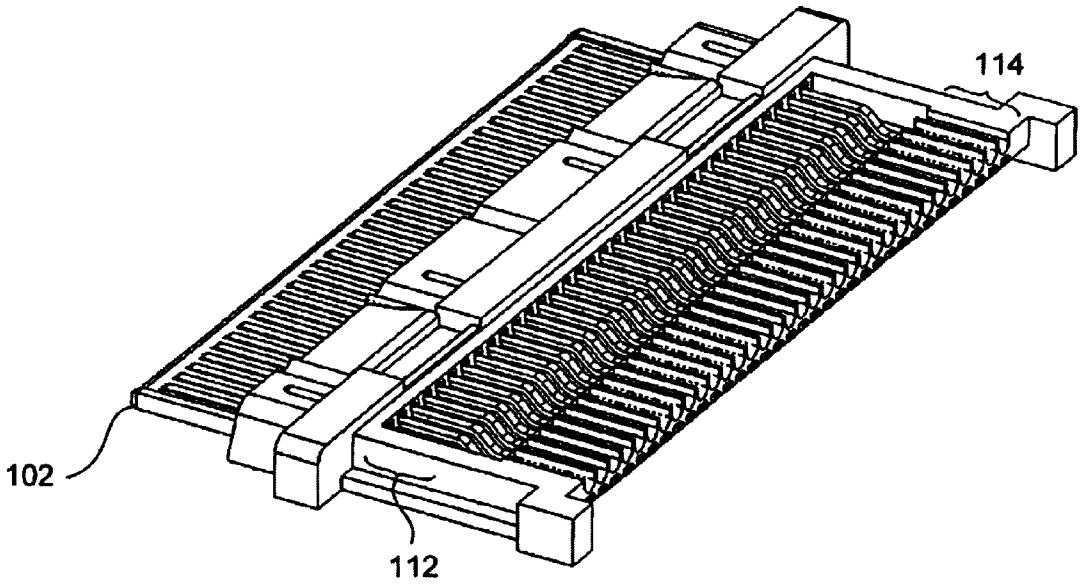


FIG. 3

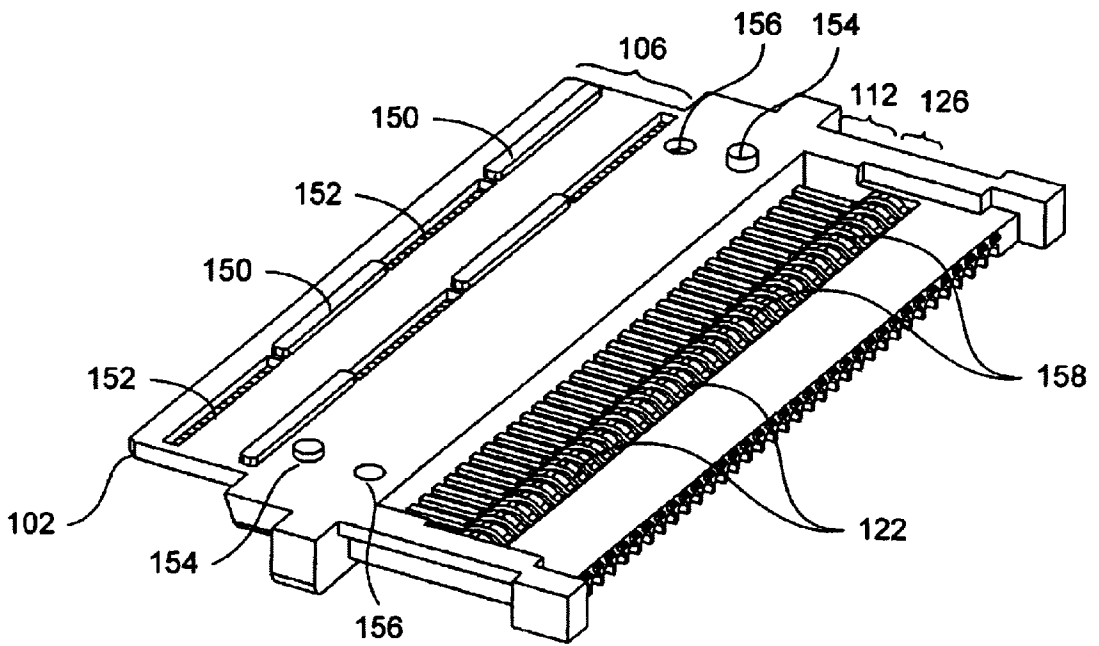


FIG. 4

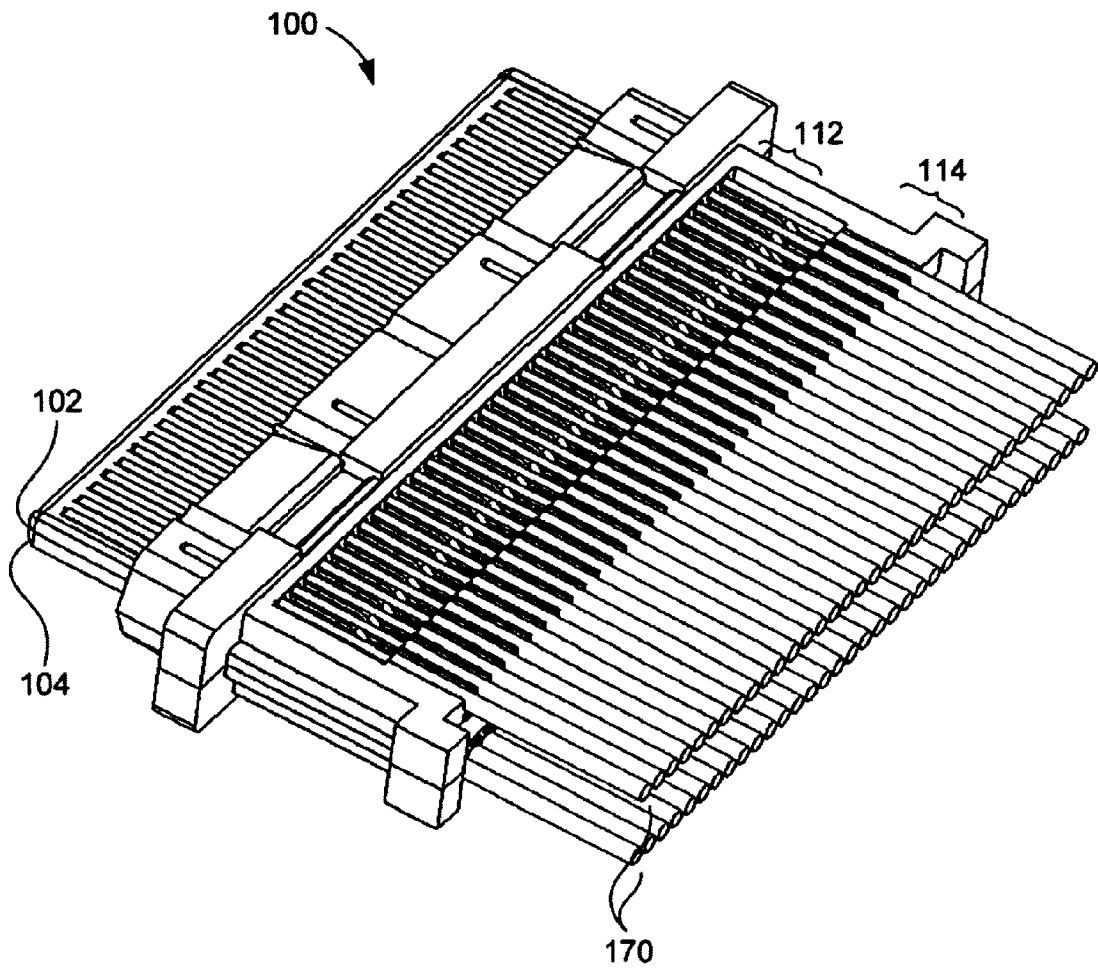


FIG. 5

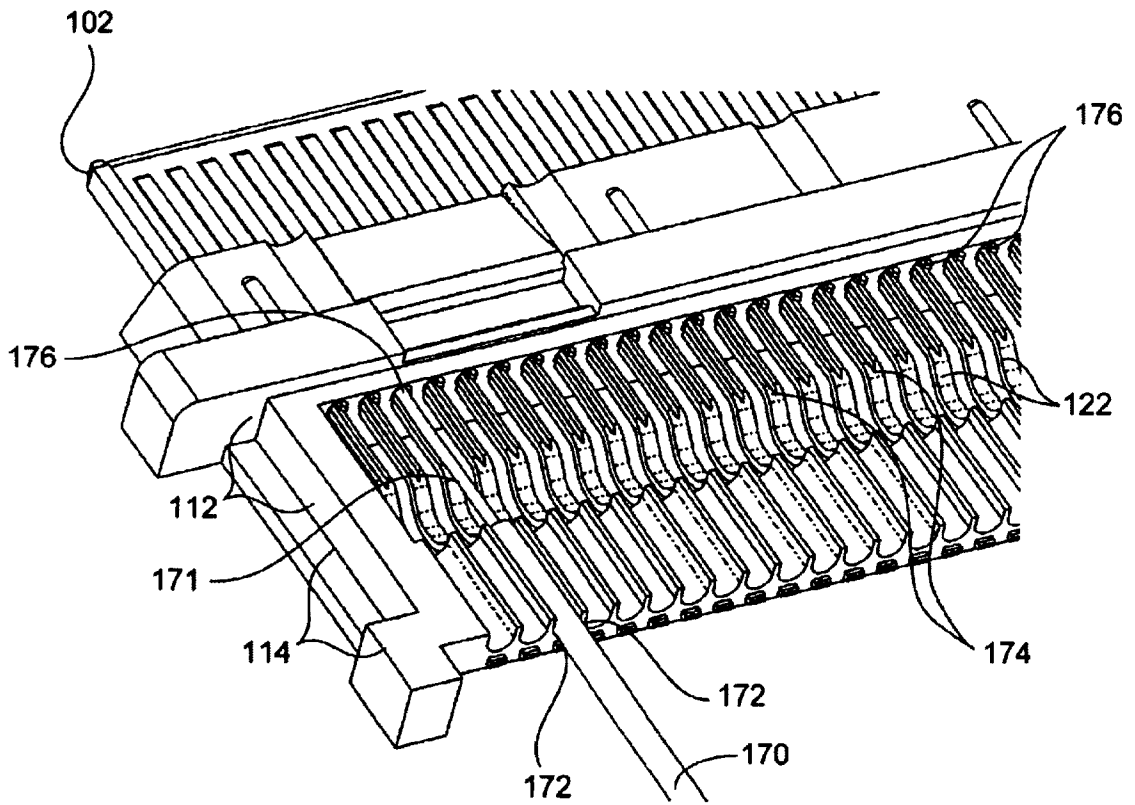


FIG. 6

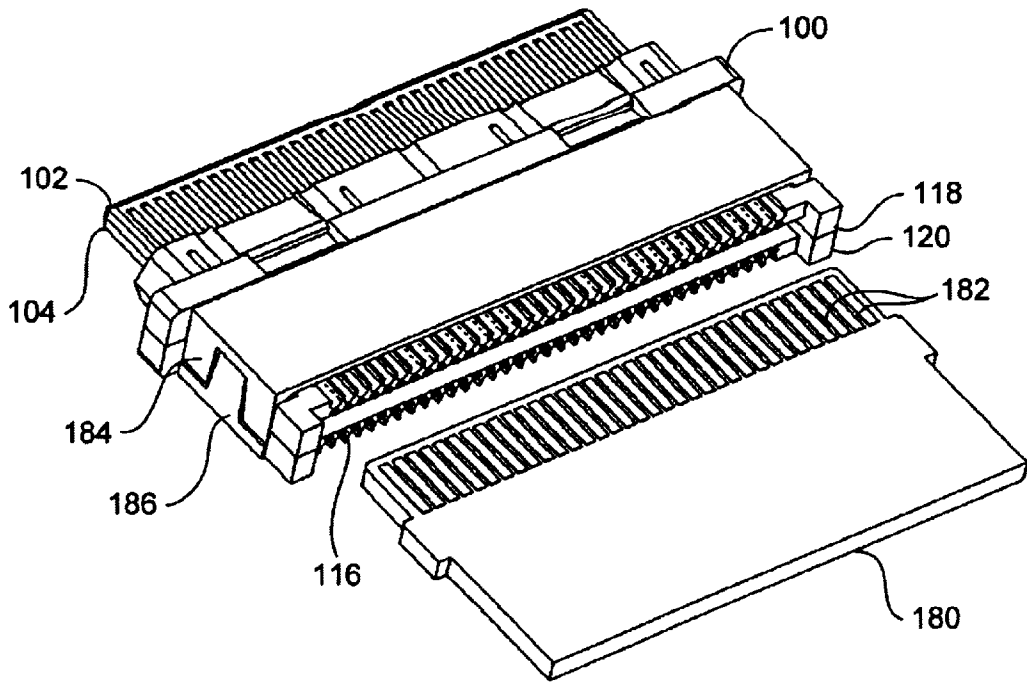


FIG. 7

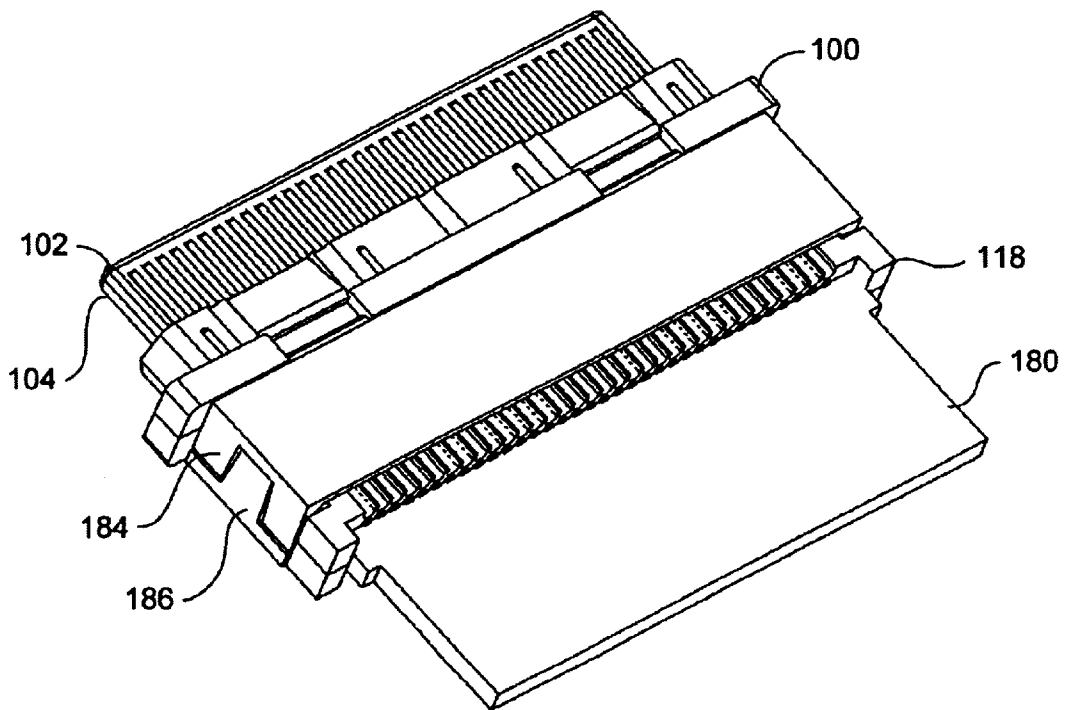


FIG. 8

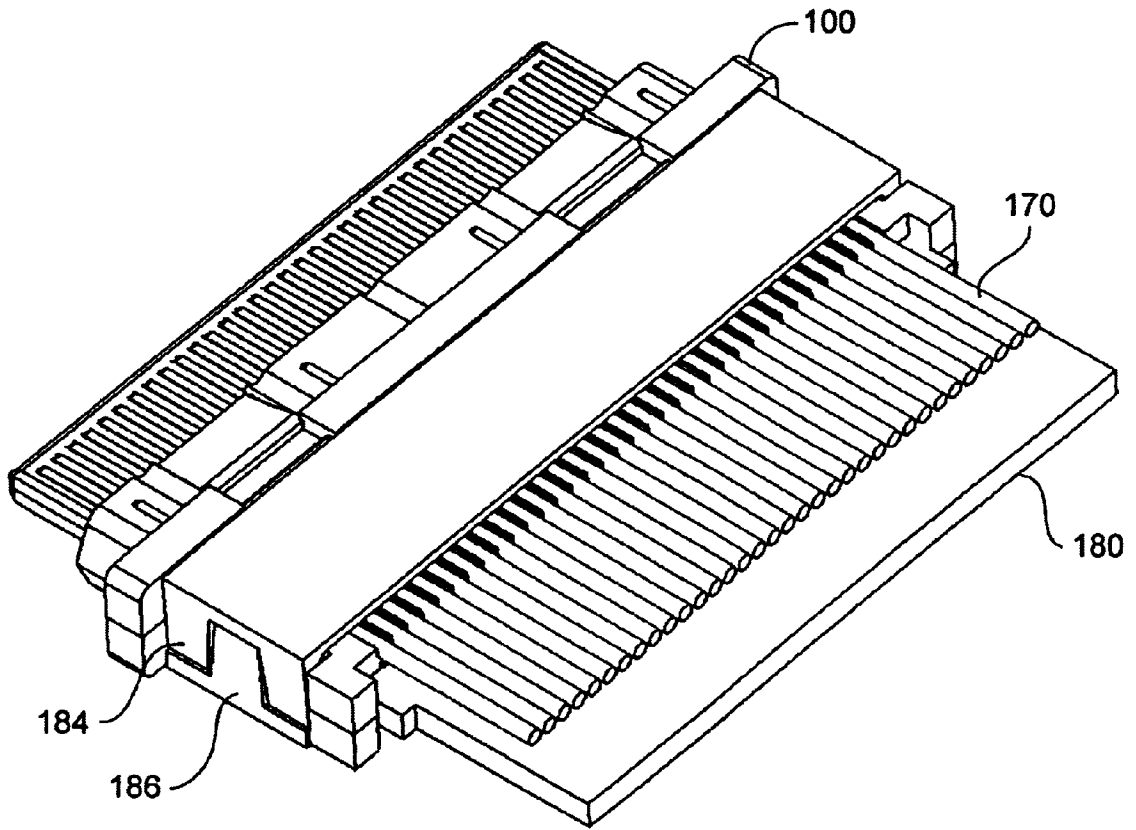


FIG. 9

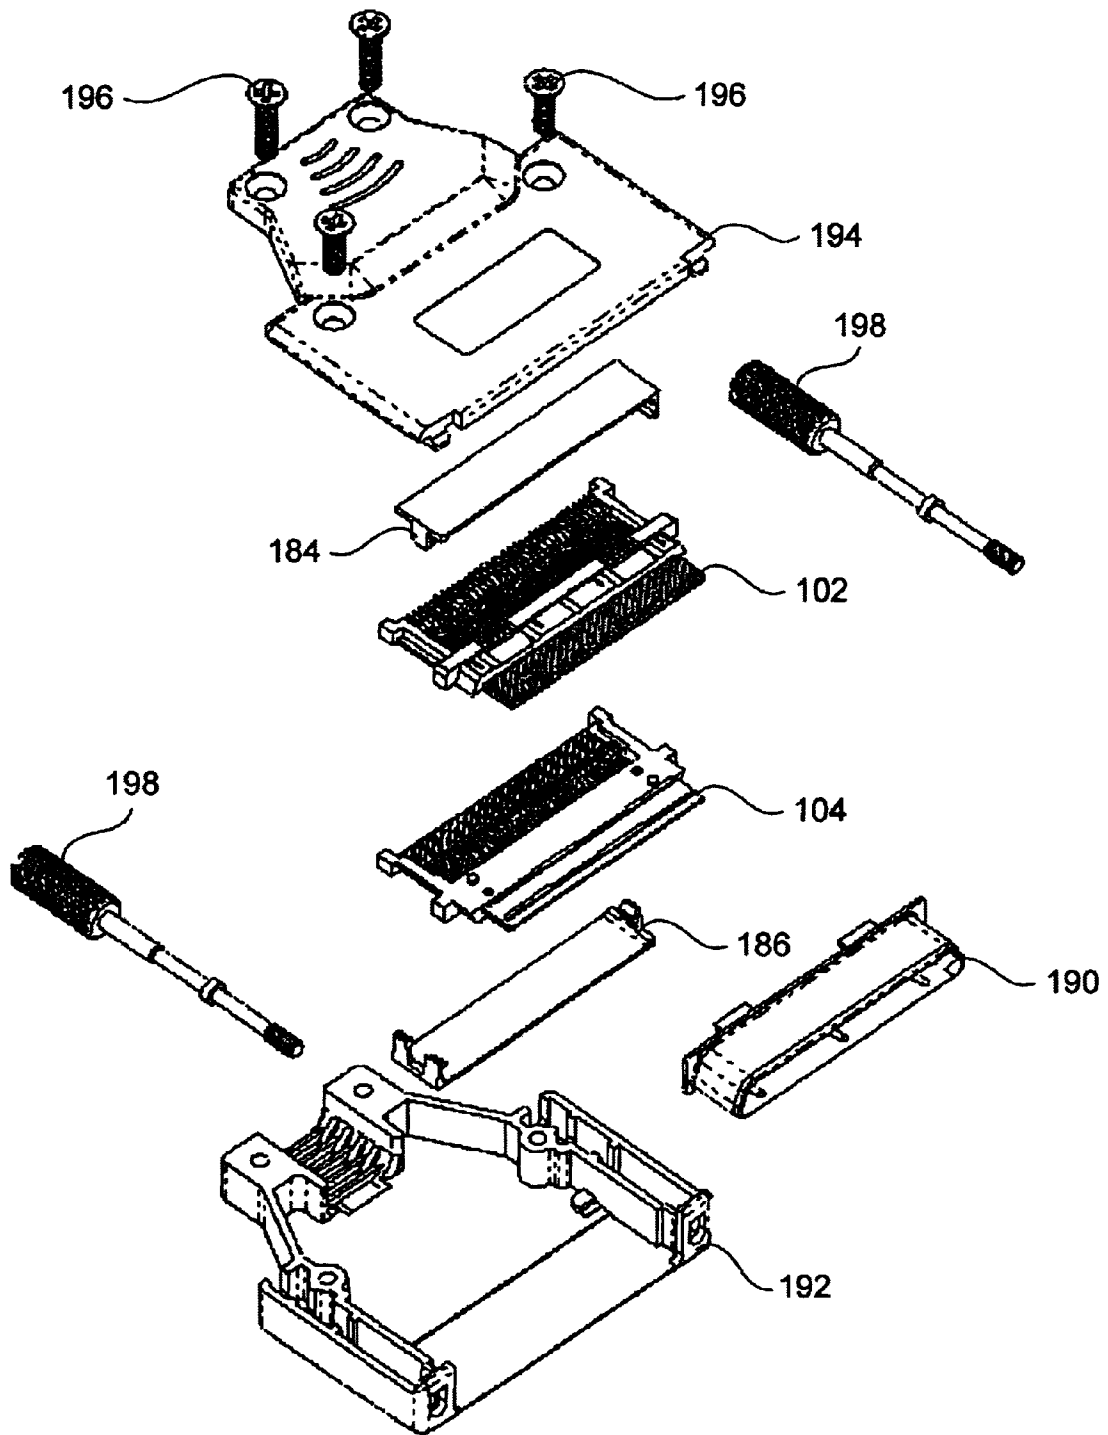


FIG. 10

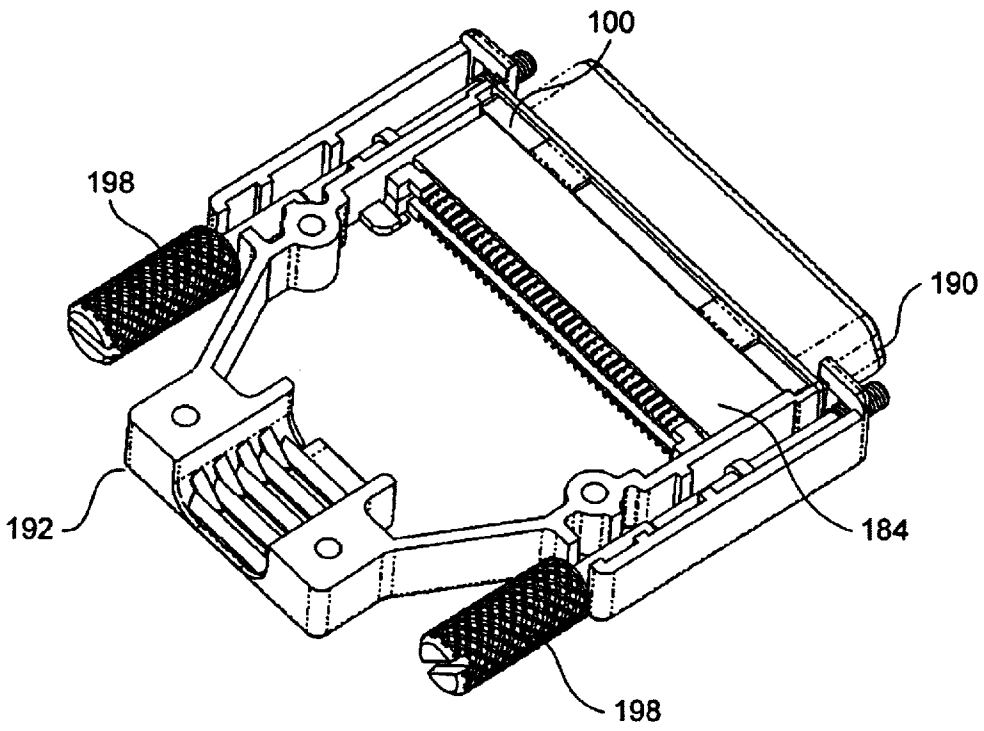


FIG. 11

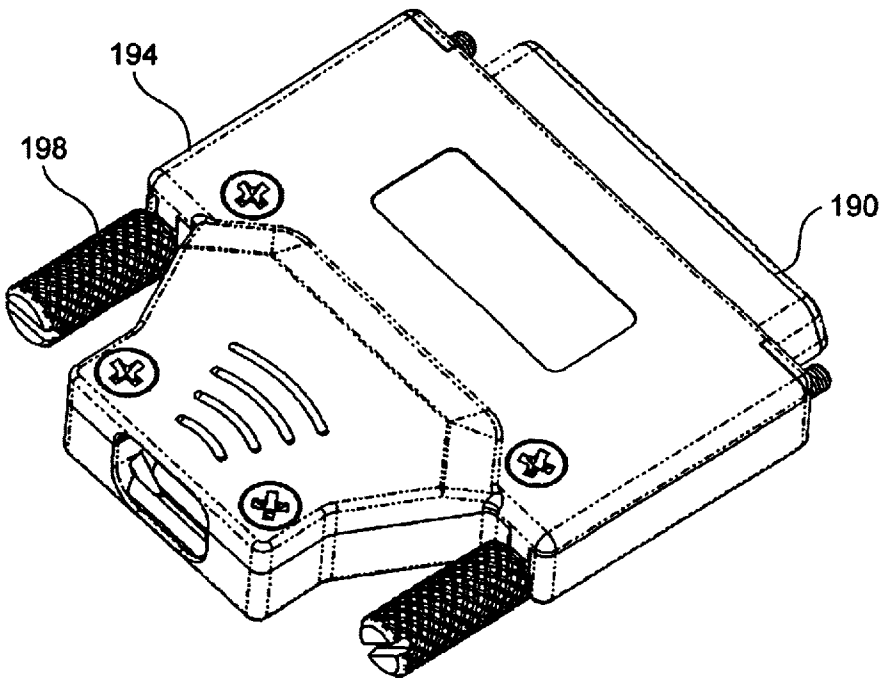


FIG. 12

HIGH DATA RATE ELECTRICAL CONNECTOR

This application claims priority of U.S. provisional patent application No. 60/276,590, filed Mar. 15, 2001 and U.S. Provisional Application No. 60/323,730 on Sep. 19, 2001, entitled "Connector," which is hereby incorporated by reference.

This application is related to U.S. patent application Ser. No. 10/007,738 entitled "MULTI-FUNCTIONAL ELECTRICAL CONNECTOR," and to U.S. patent application Ser. No. 10,008,088 entitled "ELECTRICAL CONNECTOR COMPONENT SYSTEM," filed on the same date herewith, the content of which is hereby incorporated by reference.

FIELD OF THE INVENTION

The present invention relates generally to electrical connector devices, and more specifically to connectors for use in high data rate applications.

BACKGROUND OF THE INVENTION

Current "box level" interconnect and cabling technologies utilized by original equipment manufacturer's are driving overall system level enclosures to be smaller while increasing electrical performance of these same devices. Various requirements arise in order to facilitate the increased electrical performance of these devices. For instance, it is more critical to use highly reliable discrete wire termination methods, which are the processes for attaching the end of a line, channel or circuit to an electrical contact. It is desirable to have the option of logic (e.g., a printed circuit board) and discrete wire termination methods inside the same cabling medium. It is common for form factor requirements to drive industry standard design point data rates past intended design points. For example, Very High Density Cable Interconnect (VHDCI) connector devices designed for transmitting 40 MHz data rates actually carrying mission critical data at over 2 GHz. Of course, it is advantageous if interconnecting systems are compatible with legacy and current technologies. All of these requirements require special manufacturing processes combined with small form factor assembly and packaging methodologies. The current available industry solutions limit the ability in solving these issues cost effectively.

An important aspect of technologies for interconnecting electrical cabling involves terminating the cabling at a connector device. Current technologies from terminating cabling include insulation displacement contact (IDC), the use of printed circuit boards, solder termination, and welded or "direct attach" methods. Each of these current technologies have different characteristics, which will now be briefly explained.

IDC involves attaching wires to the electrical interconnects of a connector device by placing an insulated wire between two metal prongs, which also serve as electrical contacts. The two metal prongs cut through the insulating material and at the same time make electrical contact with the conductive wire. The electrical performance of systems utilizing IDC is limited because the skew of each wire is difficult to control. The skew is the amount of misalignment between each wire and the interconnect (or contact lead) to which it is attached. Skew causes inconsistencies in the amount of contact formed between each of the wires and a respective interconnect. The variations in the amount of contact area is a critical problem in high transmission rate

applications because it disrupts the timing of the finely synchronized signals in each of the wires. Therefore, IDC is generally a lesser-preferred method for terminating cabling for critical data applications.

Printed circuit boards are used to terminate cabling by connecting PCB's to electrical interconnects and soldering discrete wires to the PCB. In this manner, the PCB's are utilized as an intermediary connecting medium and are sometimes referred to as "interposer cards." The PCB method introduces the additional discrete wire-to-interconnect termination point, which can cause further reliability and quality problems. The PCB itself also adds the cost of an additional component. PCB's actually provide some ability to improve electrical performance, for example, the embedded wire traces allow for the control of the wire layout at the PCB. However, problems arise in high frequency applications. Also, in general, the data frequency range for PCB connected systems are limited at high end, which is typically around 1 GHz.

Soldered termination involves soldering discrete wires directly to an electrical interconnect. The effectiveness of solder termination of fine pitch contacts in existing designs is limited by the ability of operators or processes to solder with a sufficient amount of precision. This naturally leads to reliability and quality problems. Additionally, material characteristics of the bond between cabling, interconnects and solder limit the performance of systems to data frequency ranges of approximately 1.2 GHz. Furthermore, current design points limit wire management options in small form factors, and electrical issues, such as skew, are virtually unsolvable at high frequencies.

Welded or "direct attach" methods involve welding wires directly to a contact surface. Skew is hard to control in welding methods due to the lack of discrete wire management features and therefore, electrical performance of the electrical system is limited. It is also very difficult to obtain consistent repeatability in welding production. Auto-indexing features of current weld tools tend to limit throughput rates. Typically, connector designs consist of multiple rows within a single housing. This usually causes problems in manufacturing since positive and negative weld plates/heads must be used. Fixturing this type of application in small form factors such as VHDCI is extremely costly.

In view of the foregoing, a low cost interconnection device capable of reliably carrying high data rates would be desirable.

BRIEF SUMMARY OF THE INVENTION

The present invention is directed to a small form factor connector device that can reliably carry high data rates and which can be implemented at a low cost. The disclosed connector device can be adopted across multiple interconnect platforms including current, legacy, or yet to be defined form factors. The device disclosed is modular in its approach, offers multiple termination mediums, and can be used in a variety of electrical packaging applications. The connector device ensures a high degree of wire position control through the use of wire retention combs and/or registration holes. The wire retention combs grip the discrete wires and the registration holes secure the ends of the exposed wires such that a stable and precise connection between the wires and the electrical contact leads of the device can be maintained. Each of these features, alone or in combination, thereby substantially reduces skew between wires and electrical interconnects of a connection device and allows for successful signal transmission at high frequen-

cies. In alternative embodiments of the connector device, one surface of the contact leads are designed to connect with discrete wires and an opposite surface of the contact leads are designed to connect to an electronic device card. In some embodiments of the present invention, the connector device is formed of two substantially identical components that are attached to each other.

One aspect of the present invention relates to an electrical connector component that includes a plurality of contact leads and a registration block. The plurality of contact leads each have a first connection portion and a second connection portion, the first connection portion being suitable for connection to an external electrical system. The registration block has a plurality of registration recesses that are positioned proximate to the second connection portion of an associated contact lead and configured to receive and position an end portion of an associated wire to be connected to the second connection portion of the associated contact lead. In an alternative embodiment of this electrical connector component further includes a wire retention comb supported by the plurality of contact leads and spaced apart from the registration block such that the second connection portion is exposed between the registration block and the wire retention comb. The wire retention comb include a row of teeth wherein at least one adjacent pair of teeth is configured to secure an associated wire that is to be connected to the second connection portion of a selected one of the contact leads.

These and other features and advantages of the present invention will be presented in more detail in the following specification of the invention and the accompanying figures, which illustrate by way of example the principles of the invention.

BRIEF DESCRIPTION OF DRAWINGS

The invention, together with further advantages thereof, may best be understood by reference to the following description taken in conjunction with the accompanying drawings in which:

FIG. 1 illustrates a perspective view of a connector device according to one embodiment of the present invention.

FIG. 1A illustrates a sectional view of the connector device of FIG. 1 along line 1A—1A.

FIG. 2 illustrates a side elevation, plan view of a pair of contact leads from the connector device of FIGS. 1 and 1A.

FIG. 3 illustrates a perspective view of the outside surface of an individual connector component used to form the connector device as shown in FIGS. 1 and 1A.

FIG. 4 illustrates a perspective view of the inside surface of the connector component as shown in FIG. 3.

FIG. 5 illustrates a perspective view of a connector device to which discrete wires have been attached.

FIG. 6 illustrates a close-up view of a single wire that has been attached to a connector component.

FIG. 7 illustrates a printed circuit board card before being inserted into a connector device according to one embodiment of the present invention.

FIG. 8 illustrates the connector device of FIG. 7 within which has been inserted the printed circuit board card.

FIG. 9 illustrates a connector device of the present invention to which has been terminated both discrete wires and a printed circuit board card.

FIG. 10 illustrates an exploded perspective view of a connector device to be installed within an external housing.

FIG. 11 illustrates an assembled connector device placed within an external housing.

FIG. 12 illustrates a fully assembled external housing that contains a connector device of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The present invention will now be described in detail with reference to a few preferred embodiments thereof as illustrated in the accompanying drawings. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art, that the present invention may be practiced without some or all of these specific details. In other instances, well known operations have not been described in detail so not to unnecessarily obscure the present invention.

The connector device of the present invention has features that allows for precise connections to electrical wires, the flexibility to connect to both wires and an electrical device card, allows for easier termination to such devices, and has a design amenable to low cost production. The features that allow for such characteristics will now be described with respect to the figures.

FIG. 1 illustrates a perspective view of a connector device 100 according to one embodiment of the present invention. Connector device 100 is designed to connect discrete wires and/or an electrical device card, such as a PCB card, to an electrical system, such as a personal computer, server, etc. Connector device 100 is formed of two substantially similar connector components 102 and 104 that are placed together, thereby giving the connector device 100 a symmetrical shape. In some embodiments, connector components 102 and 104 can be identical in shape and/or size to each other. Each of the connector components 102 and 104 have a wipe area or termination strip 106, a shroud support ledge 108, a wire registration block 110, a discrete wire contact region 112, and a wire retention comb 114. Each of the connector components 102 and 104 are formed such that when they are placed together, a device card slot 116 is created. Device card slot 116 is designed to receive and secure an electronic device card, which can be used as a wire termination medium. Specifically, the device card itself, sometimes referred to as an interposer card, will be attached to electrical wires. To guide a device card into device card slot 116, registration surfaces 118 and 120 are formed on each end of each connector component 102 and 104, respectively. It should be noted that device card slot 116 can receive various types of connection mediums that are able to fit inside the slot 116. In alternative embodiments of the present invention, the connector components 102 and 104 do not have to be substantially similar or identical in shape and/or size. For instance, each of the components 102 and 104 can have different shapes to conform to different design requirements.

Within each of the connector components 102 and 104, electrical contact leads 122 extend from the surface of the wipe area 106, to the surface of the wire contact region 112, and finally, to the inside surface of the device card slot 116. At least a portion of the inside surface of the contact leads 122 are designed to make contact with the electrical traces on a device card that is inserted into the device card slot 116. The wire contact region 112 on the outside surface of the contact leads 122 are designed to connect with discrete wires. The exposed contact leads 122 on the surface of the wipe areas 106 are designed to make contact with an

electrical system when the wipe area **106** is connected with an external connector of the electrical system. The structural region formed by the combined wipe areas **106** of the two connector components **102** and **104** is sometimes referred to as a termination strip. Connector device **100** is thereby able to connect both discrete wires and a device card to an electrical system. The connector device **100** can be used in various ways such that in some embodiments, only discrete wires are attached, in others only a device card is inserted, and sometimes, both discrete wires and a device card can be connected to the connector device **100**.

The fact that the connector device of the present invention is formed from two similar components is advantageous for various reasons. First, forming the connector device **100** from two similar or identical connector components **102** and **104** allows for lower overall production costs since less tooling is required to manufacture components having different configurations. Also, assembling and attaching wires to the connector device becomes simpler since the connector components can be worked with separately. This is especially advantageous given that the connector devices of the present invention are intended to be manufactured to have small form factors. As should be appreciated by those of skill in the art, the connector components that form the connector device are preferably made of a dielectric material. In alternative embodiments of the present invention, the connector device **100** can be formed from a single piece of material, rather than be formed from two separate halves. In other embodiments of the invention, the connector device could have contact leads **122** on only one side of the connector device.

Registration block **110** and wire retention comb **114** are provided to firmly secure the connection of each of the discrete wires to the wire contact regions **112** of respective contact leads **122**. The registration block **110** stretches across the width of the connector device **100** and includes registration holes **124** that are aligned with each of the contact leads **122**. By inserting the end of each discrete wire into a respective registration hole **124**, the end of each wire can be accurately secured, thereby aligning one end of each of the wires with a respective contact lead **122** to which the wire will be connected. Such alignment also tends to align the longitudinal axis of the wires with the longitudinal axis of the wire connection regions **112** of the contact leads **122**. Each of the registration holes **124** preferably have the same depth so that the ends of the wires attached to the wire connection region **112** are aligned along the same axis. The diameter of each registration hole **124** should be sized to securely restrain the ends of each wire above a respective contact lead **122**. The registration holes provide added precision in the termination of discrete wires to contact leads, which is critical in high speed data applications.

The wire retention comb **114** includes a set of teeth that are designed to receive and secure the discrete wires. The width between each teeth of the retention comb **114** is sized so that each pair of teeth can firmly secure a wire to the connector device through frictional forces. Preferably, each pair of teeth will grip onto the insulated portion of a discrete wire. The teeth are positioned such that each wire will be secured directly above the wire connection region **112** of a respective contact lead **122**. The retention comb **114** thereby increases the stability and strength of the electrical connection between the discrete wires and the contact leads **122** in the wire contact region **112**. The registration block **110** and the retention comb **114** work together to strengthen the connection between the discrete wires and the contact leads **122** by securing both ends of each of the wires that will make

contact with the wire connection region **112** of the contact leads **122**. The registration block **110** and the retention comb **114** also ensure that the longitudinal axes of both the wires and the wire connection regions **112** of the contact leads align with each other. Additionally, the wire retention comb **114** provides the discrete wires with strain relief, which is the ability of the wires to remain connected to the contact leads **122** despite forces applied to the wires during physical handling of the connector device **100**. The wire retention comb **114** provides added precision in the termination of electrical wires to the contact leads, thereby making the connector device **100** capable for convey data at high rates.

In alternative embodiments of the present invention, the connector device may only incorporate either the registration block **110** or the retention comb **114**, but not both. Such design considerations will depend upon the specific application for which the connector device will be used.

The shroud support ledge **108** provides a surface upon which to attach a shroud in order to cover and protect the exposed contact leads **122** on the surface of the wipe areas **106**.

FIG. 1A illustrates the connector device **100** in greater detail. FIG. 1A illustrates a sectioned view of connector device **100** along line 1A—1A, as shown in FIG. 1. A contact lead **122** can be seen within the sectioned surface of the connector device **100** to run from the wipe area **106** to the wire contact region **112** and then to the device card contact region **126**. Due to the drawing limitations required for clarity purposes within FIG. 1A, the bracket designating device card contact region **126** is positioned on the outside of connector device **100** even though device contact regions **126** are located on the interior surface of the device card slot **116**. The contact leads **122** have a bending profile that can be more clearly seen in FIG. 2.

Also, as can be seen in FIG. 1A, the top and bottom surfaces of the wire contact regions **112** in each of the connector components **102** and **104** are exposed between the registration block **110** and the wire retention comb **114**. Exposing both the top and bottom surfaces of the wire contact regions **112** is useful when the connector components **102** and **104** are separated from each other. For when the connector components are separated from each other, welding mechanisms can more easily make contact with the contact leads **122** on the two separate surfaces to form the required electrical circuit. The exposure of the wire contact regions **112** makes it possible to mass weld a respective wire onto each of the plurality of contact leads simultaneously.

FIG. 2 illustrates a side plan view of an isolated pair of conductive contact leads **122(a)** and **122(b)**, shown in their relative orientations when connector components **102** and **104** are placed together. Contact lead **122(a)** represents a contact lead from connector component **102** and contact lead **122(b)** represents a contact lead from connector component **104**. Section A is the portion of the connector leads **122** in the wipe area **106**. The outside portions of the contact leads in section B make contact with discrete wires in the wire connection area **112**, and the inside portions of the contact leads in section C make contact with a device card in the device contact region **126**. Note that the contact surfaces in sections B and C are on opposite surfaces of the contact leads **122**. The contact leads **122** bend inwards at section C to form a leaf spring configuration such that the contact leads **122(a)** and **122(b)**, together, exert a compressive force on an inserted device card. The compressive force provides a more secure connection between the connector device **100** and an inserted device card. In some embodiments, the longitudinal

axes of the contact leads **122** in sections A and C are within the same plane. In other embodiments, depending upon the design requirements, the contact leads in section C are closer to each other than the contact leads in section A.

The connector device **100** can have a varying number of contact leads **122** that span the length of each connector component **102** and **104** depending upon the specific data application. In one common embodiment, each of the connector components **102** and **104** have thirty-four (34) contact leads **122** such that connector device has a total of 68 contacts.

The connector device of the present invention is versatile with respect to the various termination methods that can be utilized. As shown above, discrete wires and device cards can be attached to the connector device **100**. Discrete wires can be terminated through soldering or through welding, which creates a direct metallurgic bond. In soldering and welding type terminations, mass or discrete termination of wires is possible since the wire contact regions **112** are not obstructed to machining tools. Mass termination refers to the process of simultaneously connecting multiple wires to respective contact leads. On the other hand, discrete termination refers to connecting wires individually to respective contact leads. To accomplish the various termination methods, the only changes needed are in the plating of the contact leads **122**. For instance, when soldering the discrete wire attachment, tin and lead is used, and when the wires are welded to the contact leads **122**, nickel is used to plate the contact leads **122**. In some applications of the connector device of the present invention, each of the pair of connector components of the connector device **100** could be terminated to discrete wires using different techniques depending upon specific design criteria.

The device card can be attached to the connector device of the present invention via soldering with tin and/or lead.

Embodiments of the connector device can be based on the Very High Density Cable Interconnect (VHDCI) standard, which is applicable to Low Voltage Differential-Small Computer System Interface (LVDS-SCSI) applications for both current and legacy interconnect schemes. VHDCI connectors and retention schemes comply with physical interface and performance requirements set forth in Standard Proposal No. 3652-A, issued by the Electronic Industries Association.

FIG. 3 and FIG. 4 illustrate perspective views of an isolated connector component **102**. FIG. 3 is a view of the outside surface of the connector component **102**, which includes wire connection region **112**. FIG. 4 is a view of the inside surface of the connector component **102**, which will make contact with the connector component **104**. As can be seen in FIG. 4, the inside surface of the wire region **106** has locking bars **150** and locking channels **152**. Each of the locking bars **150** and locking channels **152** will fit into locking channels and locking bars, respectively, on a mating connector component. These locking bars and channels help the connector components maintain a relative orientation with respect to each other when attached to each other. Near the locking bars **150** are also formed locking knobs **154** and locking holes **156**, which act similarly to lock mating connector components together. As appreciated by those of skill in the art, the locking bars, channels, knobs and holes can have other various shapes, sizes, and positions on the inside surface of the connector components. These various locking features can be generically referred to as locking pegs and recesses. In some embodiments, the locking pegs and recesses can be shaped so that each peg snaps into and is therefore securely held by a respective recess. Such

“snap-fitting” pegs and recesses can be used to secure the connection between a pair of connector components.

As shown in FIG. 4, the contact leads **122** are spaced apart from each other such that air spaces **158**, spanning from the wire connection area **112** to the device card connection area **126**, exist between each of the leads **122**. The air spaces **158** increase the electrical performance of the connector device **100** by maximizing the “dielectric constant of air.” Of course, it is understood that the contact leads **122**, in the wire contact region **112** and the device card contact region **126**, could also be embedded in the dielectric material that forms each of the connector components.

FIGS. 5 and 6 will now be presented to illustrate how discrete wires are connected to the connector device **100**. FIG. 5 illustrates a perspective view of a connector device **100** having discrete wires **170** connected to each of the contact leads **122** in the wire connection area **112** of each of connector components **102** and **104**. Only the portion of the wires **170** leading out from the wire connection area **112** are shown for simplicity’s sake.

FIG. 6 illustrates a close-up, perspective view of connector component **102** and a single, attached wire **170**. The insulated portion of the wire **170** is placed between a pair of teeth **172** of the wire retention comb **114**. Each pair of teeth **172** are spaced apart so that they securely grip the insulated wire **170**. By gripping the insulated portion of the wire **170**, the exposed end **171** of the wire **170** can remain in contact with the contact lead **122** regardless of typical external forces exerted on the wires **170** during installation processes. As can be seen, the exposed, conductive end **171** of wire **170** is placed on top of a contact lead **122** to form an electrical connection. In some embodiments of the present invention, the contact leads **122** can be formed to have a recessed trough **174** that runs the length of the contact lead **122** in the wire connection area **112**. The recessed troughs **174** are sized such that the exposed portion of the wire **170** can rest within the troughs **174** and therefore be more securely fixed to the contact leads **122**. The exposed end **171** of wire **170** is inserted into a registration hole **176** formed in the registration block **110**. As can be seen, the registration holes **176** are aligned with each of the contact leads **122**. As mentioned earlier, registration holes **176** are recessed areas that secure the ends of the wires so to keep them aligned for proper contact with the contact leads **122**. In high data rate transmission applications it is important to terminate each of the discrete wires **170** so that they connect to the contact leads **122** through the same amount of contact area or length. Having the same length is important since the uniformity of contact surface area affects signal propagation. Aligning multiple discrete wires along the registration block **110** and within the registration holes **176** allows the wires to have uniform contact points with the contact leads **122**. As mentioned above, the wire **170** can be fixed to the wire connection region **112** of the contact leads **122** either through soldering or welding.

FIGS. 7 and 8 respectively illustrate connector **100** prior to and after receiving a PCB card **180** according to one embodiment of the present invention. As can be seen in FIG. 7, PCB card **180** is inserted with the end having electrical connection points **182** into the device card slot **116**. Once the PCB card **180** is inserted, as seen in FIG. 8, electrical connection points **182** make contact with the electrical contact leads **122** in the device card connection region **126**. In some embodiments, the registration surfaces **118** and **120** have an additionally formed hook that is designed to clip onto a notch formed in the PCB card **180** in order to secure the connection between the connector device **100** and the

PCB card **180**. Not shown, for clarity sake, are the electrical wires that are connected to the PCB card **180**. For easier manufacturing, the wires can be connected to the PCB card **180** before the PCB card **180** is inserted into the connector device **100**.

Also illustrated in FIGS. **7** and **8** are two locking clamps **184** and **186**, which are attached to the connection device **100** in such a way as to wrap around the connection device **100** and hold the individual connector components together. The two locking clamps **184** and **186** wrap around the wire contact regions **112** and the wire retention combs **114** of both connector components **102** and **104**. The locking clamps **184** and **186** can have various shapes and sizes such that they can cover more or less area of the connector device **100**. As can be seen in FIG. **10**, each of clamps **184** and **186** is formed of a flat panel that has clips on either end. The locking clamps **184** and **186** are designed so that their respective panels cover one of the connector components while their respective clips attach to the other connector component. In this manner the locking clamps tend to secure the attachment between the connector components **102** and **104**. In some embodiments, the flat panel surfaces of the locking clamps **184** and **186** also press down on the insulated portions of the discrete wires **170** and thereby provide additional strain relief. It is possible to use only one locking clamp, as opposed to using two at the same time.

Clamps **184** and **186** have are the same shape and size, thereby making the manufacture of these pieces easier. However, in alternative embodiments, clamps **184** and **186** can have different shapes and sizes. In alternative embodiments, no locking clamps are required. For instance, in these embodiments, the connector components **102** and **104** may clip to each other or they may be held together with an adhesive material such as epoxy.

FIG. **9** illustrates a perspective view of a connector device **100** utilized in a hybrid manner in which both discrete wires **170** and a PCB card **180** have been connected to the device **100**. The hybrid method of using the connector device **100** allows for logic and design specific signals to be carried within the same medium. Potential uses could include active termination assemblies or "smart logic" cable assembly applications.

FIG. **10** illustrates an exploded perspective view of the various components that can be used to utilize a connector device of the present invention in order to form a connection between electrical systems. Starting from the middle of FIG. **10**, connector components **102** and **104** will be combined as describe above to form connector device **100**. Locking clamps **184** and **186** then lock the connector components **102** and **104** together. Shroud **190** is placed onto the shroud support ledge of the connector device so to protect the exposed contact leads **122** within the wipe area **106**. Finally, external housing components **192** and **194** are designed to receive and protect the assembled connector device. Screws **196** are used to lock the connector device within the protective external housing components **192** and **194**, and post screws **198** are used to lock the connection device to an electrical system, such as a server or a personal computer. Of course, it is possible to connect various electrical systems utilizing the connector device **100** without the use of the external housing components **192** and **194**, however, a more protected and more secure connection can be formed when using such an external housing.

FIG. **11** illustrates a connector device **100**, wrapped in locking clamps and covered by a shroud **190**, after it is placed into the bottom external housing component **192**.

FIG. **12** illustrates the fully assembled connector device that is within the external housing components **192** and **194**.

While this invention has been described in terms of several preferred embodiments, there are alteration, permutations, and equivalents, which fall within the scope of this invention. It should also be noted that there are many alternative ways of implementing the methods and apparatuses of the present invention. It is therefore intended that the following appended claims be interpreted as including all such alterations, permutations, and equivalents as fall within the true spirit and scope of the present invention.

We claim:

1. An electrical connector component comprising:

a support block;

a plurality of contact leads supported by the support block each of the contact leads having first and second connection portions that extend out from opposing ends, respectively, of the support block, wherein the first connection portions of the contact leads are configured to connect with an external electrical system, at least one of the contact leads also having a third connection portion on a surface of the contact leads that is opposite to the surface of the contact lead containing the first connection portion, the thin connection portion configured to make contact with a trace on an electrical device;

a registration block having a registration surface suitable for aligning the end portions of each of a plurality of associated wires to be connected to the second connection portion of the associated contact lead; and

a wire retention comb supported by the plurality of contact leads mid spaced apart from the registration block such that the second connection portion is exposed between the registration block and the wire retention comb, the wire retention comb including a row of teeth wherein at least one adjacent pair of teeth is suitable for receiving an associated wire that is to be connected to the second connection portion of a selected one of the contact lead.

2. An electrical connector component as recited in claim 1 wherein the registration surface is substantially flat such that the end portions of each of the plurality of wires are aligned along a single axis.

3. An electrical connector component as recited in claim 1 wherein a top and a bottom surface of the second connection portion of each of the contact leads is exposed between the registration block and the retention comb.

4. An electrical connector component as recited in claim 1 wherein at least some of the adjacent pair of teeth are also suitable for securing an associated wire that is to be connected to the second connection portions of the contact leads.

5. An electrical connector component as recited in claim 1 wherein the registration surface, of the registration block has a plurality of registration recesses, each of the registration recesses suitable for receiving and positioning an end portion of an associated wire to be connected to the second connection portion of the associated contact lead.

6. An electrical connector component as recited in claim 5 wherein the distance between the centers of each pair of adjacent registration recesses is approximately 0.8 mm.

7. An electrical connector component as recited in claim 5 wherein the registration recesses have substantially the same depth.

8. An electrical connector component as recited in claim 5 wherein the registration recesses have registration surfaces

11

that are aligned along an axis such that when wires are attached to the second connection portions of the contact leads with their respective wire ends engaging the registration surfaces, the ends of the wires are aligned along the axis.

9. An electrical connector comprising a pair of electrical connector components that are attached to each other, each of the electrical connector components comprising:

a support block;

a plurality of contact leads supported by the support block; each of the contact leads having first and second connection portion that extend out from opposing ends, respectively, of the support block wherein the first connection portions of the contact leads are configured to connect with an external electrical system, each of the plurality of contact leads also having a third connection portion on a surface of a respective contact lead opposite to the surface on which the second connection portions are located, the third connection portions suitable for making contact with traces on an electrical device;

a registration block having a registration surface suitable for aligning the end portions of each of a plurality of associated wires to be connected to the second connection portion of the associated contact lead; and

a wire retention comb supported by the plurality of contact leads and spaced apart from the registration block such that the second connection portion is exposed between the registration block and the wire retention comb, the wire retention comb including a row of teeth wherein at least one adjacent pair of teeth is suitable for receiving an associated wire that is to be connected to the second connection portion of a selected one of the contact leads.

10. An electrical connector as recited in claim 9 wherein the distance between the center of each pair of adjacent registration recesses on each of the electrical connector components is approximately 0.8 mm.

11. An electrical connector as recited in claim 9 wherein the electrical connector components are substantially identical.

12. An electrical connector as recited in claim 9 wherein at least some of the adjacent pair of teeth are also suitable for securing an associated wire that is to be connected to the second connection portions of the contact leads.

13. An electrical connector as recited in claim 9 wherein the registration surface of each electrical connector component has a plurality of registration recesses, each of the registration recesses suitable for receiving and positioning an end portion of an associated wire to be connected to the second connection portion of an associated contact lead.

14. An electrical connector recited in claim 9 wherein the plurality of contact leads within each of the electrical connector components form a slot into which an electrical device can be inserted.

15. An electrical connector as recited in claim 14 wherein the plurality of contact leads within each of the electrical connector components are curved such that the distance between the third connection portions of each of the electrical connector components are closer to each other than the distance between the second connection portions of each of the electrical connector components, whereby the curved configuration of the contact leads tends to secure an electrical device between the plurality of contact leads.

16. An electrical connector as recited in claim 9 wherein one of the pair of electrical connector components is a first connector component and the other is a second connector component, the electrical connector further comprising:

12

a first latch having a panel and least two clasps wherein one clasp extends from a first end of the panel and another clasp extends from a second end of the panel, the panel covering at least a portion of the wire retention comb of the first connector component and the clasps secured to the second connector component such that the clasps lock the first and second connector components together, the panel being suitable for making contact with the wires connected to the second connection portion of the contact leads such that the wires are locked into the teeth of the retention comb of the first connector component.

17. An electrical connector recited in claim 16 further comprising:

a second latch having a panel and at least two clasps wherein one clasp extends from a first end of the panel and another clasp extends from a second end of the panel, the panel covering at least a portion of the wire retention comb of the second connector component and the clasps secured to the first connector component such that the clasps lock the first and second connector components together, the panel being suitable for making contact with the wires connected to the second connection portion of the contact leads such that the wires are locked into the teeth of the retention comb of the second connector component.

18. An electrical component comprising:

a plurality of contact leads, each of which have a first connection portion and a second connection portion, the first connection portion configured to connect to an external electrical system; and

a registration block having a row of circular registration holes, each of the registration holes being positioned proximate to the second connection portion of an associated contact lead and configured to receive and position an end portion of an associated wire to be connected to the second connection portion of the associated contact lead, the distance between the centers of each pair of adjacent registration holes being approximately 0.8 mm.

19. An electrical connector component as recited in claim 18 further comprising:

a wire retention comb supported by the plurality of contact leads and spaced apart from the registration block such that the second connection portion is exposed between the registration block and the wire retention comb, the wire retention comb including a row of teeth wherein at least one adjacent pair of teeth is configured to secure an associated wire that is to be connected to the second connection portion of a selected one of the contact leads.

20. An electrical connector component as recited in claim 19 wherein a top and a bottom surface of the second connection portion of each of the contact leads is exposed between the registration block and the wire retention comb.

21. An electrical connector component comprising:

a plurality of contact leads, each of which have a first connection portion and a second connection portion, the first connection portion configured to connect to an external electrical system; and

a registration block having a row of circular registration holes, each of the registration holes being positioned proximate to the second connection portion of an associated contact lead and configured to receive and position an end portion of an associated wire to be connected to the second connection portion of the

associated contact lead, wherein the registration block has a density of registration holes of approximately 12.5 holes per centimeter.

22. An electrical connector component as recited in claim 21 further comprising:

a wire retention comb supported by the plurality of contact leads and spaced apart from the registration block such that the second connection portion is exposed between the registration block and the wire retention comb, the wire retention comb including a row of teeth wherein at least one adjacent pair of teeth is configured to secure an associated wire that is to be connected to the second connection portion of a selected one of the contact leads.

23. An electrical connector component as recited in claim 22 wherein a top and a bottom surface of the second connection portion of each of the contact leads is exposed between the registration block and the wire retention comb.

24. An electrical connector component comprising:

a support block;

a plurality of contact leads supported by the support block, each of the contact leads having first and second connection portions that extend out from opposing ends, respectively, of the support block, wherein the first connection portions of the contact leads are configured to connect with an external electrical system;

a registration block having a row of circular registration holes that are each positioned proximate to the second connection portion of an associated contact lead, the circular registration holes configured to receive and align the end portions of each of a plurality of associated wires to be connected to the second connection portion of the associated contact lead; and

a wire retention comb supported by the plurality of contact leads and spaced apart from the registration block such that the second connection portion is exposed between the registration block and the wire retention comb, the wire retention comb including a row of teeth wherein at least one adjacent pair of teeth is suitable for receiving an associated wire that is to be connected to the second connection portion of a selected one of the contact leads.

25. An electrical connector component as recited in claim 24 wherein the second connection portions of the contact leads have lengthwise grooves configured to receive and align a lengthwise portion of each of the plurality of wires.

26. An electrical connector component as recited in claim 24 wherein the distance between the centers of each pair of adjacent registration holes is approximately 0.8 mm.

27. An electrical connector component as recited in claim 24 wherein a top and a bottom surface of the second connection portion of each of the contact leads is exposed between the registration block and the wire retention comb.

28. An electrical connector component as recited in claim 24 wherein the least one of the plurality of contact leads further comprises:

a third connection portion on a surface of the contact leads that is opposite to the surface of the contact lead containing the first connection portion, the third connection portion configured to make contact with a trace on an electrical device.

29. An electrical connector component as recited in claim 24 wherein at least some of the adjacent pair of teeth are also

suitable for securing a associated wire that is to be connected to the second connection portions of the contact leads.

30. An electrical connector component comprising:

a plurality of contact leads that are etch suitable for making contact with an associated wire;

a support block that has a front end and a rear end, wherein the support block supports the plurality of contact leads;

a registration surface formed on the rear end of the support block wherein the registration surface is suitable for aligning end portions of wires that no to be connects to associated contact leads; and

a wire retention comb having a row of teeth wherein at least one adjacent pair of teeth is suitable for receiving an associated wire that is to be connected to the contact leads, wherein the wire retention comb is spaced apart from the registration surface such that the contact leads are exposed between the registration surface and the wire retention comb, whereby the registration surface and the wire retention comb arranged to act together to align wires with associated contact leads.

31. An electrical connector component as recited in claim 30 wherein the support block supports the plurality of contact leads such that they extend out from a rear end of the support block, each of the contact leads further comprising:

a front extension portion that extends out of the front end of the support block wherein the front extension portion is suitable for making contact with an external electrical system.

32. An electrical connector component as recited in claim 30 wherein each of the contact leads is configured to make contact with an associated wire at a first connection region, the first connection region located on a first surface of each contact lead, each of the contact leads further comprising:

a second connection region located on a second surface that is opposite to the first surface, the second connection region being suitable for making contact with an associated trace on an electrical device.

33. An electrical connector component as recited in claim 30 wherein each of the contact leads further comprises:

a recessed trough that runs along a lengthwise axis of each contact lead wherein each recessed trough is configured to receive a lengthwise portion of an associated wire and thereby align the wire with the contact lead.

34. An electrical connector component as recited in claim 30 wherein at least some of the adjacent pair of teeth are also suitable for securing an associated wire.

35. An electrical connector component as recited in claim 30 wherein the registration surface is substantially flat with that the end portions of each of the wires are aligned along a single axis.

36. An electrical connector component as recited in claim 35 wherein the contact leads extend out from the support block in a substantially perpendicular orientation with respect to the registration surface.

37. An electrical connector component as recited in claim 30 wherein the registration surface has a plurality of registration recesses, each of the registration recesses suitable for receiving and positioning the end portion of each wire.

38. An electrical connector component as recited in claim 37 wherein the registration recesses have substantially the same depth.